ASB200-909 Slim Type System for IBASE IB909 3.5" Disk-Size SBC



Features

- Fanless system supports IBASE IB909 3.5-inch Disk-Size SBC
- Onboard 5th Gen. Intel[®] Core[™] i7 U-series processor
- iSMART- for auto-scheduler and power resume
- Supports 1x Mini PCI-E (full-size)
- Supports 1x 2.5" SATA HDD device
- Wall mount kit included
- 12V~24V DC wide-range power input


Specifications

| System Mainboard | IB909AF-5650 / IB909AF-5350 |
|-----------------------------|--|
| CPU Type | 5th Generation Intel® Core™ i7 5650U / i5 5350U processor |
| System Speed | 2.2GHz / 1.8GHz |
| Memory | 2x 2GB DDR3L-1600 SO-DIMM memory, Max.16GB |
| Construction | Aluminum & steel |
| Chassis Color | Black |
| Front Panel External I/O | 1x power button 2x USB 2.0 1x CFast socket 1x HDD LED |
| Rear Panel External I/O | 4x COM (1x RS-232/422/485 + 3x RS-232) 2x USB 3.0 ports 1x DVI-I 2x RJ-45 GbE connector 1x 12V~24V DC-in (terminal block type) |
| Storage | 1x 2.5" HDD or SSD |
| Power Supply | Optional 60W power adaptor |
| Mounting | Desktop or wall mount (wall mount kit included) VESA mount (option) |
| Dimensions | 180mm(W) x 150mm(D) x 66mm(H) 7.09" (W) x 5.91" (D) x 2.6" (H) |
| Operating Temperature | 0°C~45°C (32°F~113°F) (With HDD) -10°C~60°C (14°F~140°F) (With SSD) |
| Storage Temperature | -20°C ~ 80°C (-4°F~176°F) |
| Relative Humidity | 5~90% @ 45°C, (non-condensing) |
| Vibration | Operating: 0.25Grms / 5~500Hz Non-operating: 1Grms / 5~500Hz |
| Shock | Operating: 20G / 11ms Non-operating: 40G / 11ms |
| Certification | CE / LVD / FCC Class B / CCC |
| | |

Ordering Information

| ASB200-909- 5650 | Fanless chassis with IB909AF-5650, Intel® i7-5650U 2.2GHz CPU, 2x COM, 2x 2GB DDR3L memory, 2.5" 320GB SATA HDD (w/o 60W power adaptor and VESA mount bracket) |
|---------------------|--|
| ASB200-909- 4COM | Fanless chassis with IB909AF5350, Intel® i5-5350U 1.8GHz CPU, 4x COM (IBD-182 COM Mini PCI-E card), 2x 2GB DDR3L memory, 2.5" 320GB SATA HDD (w/o 60W power adaptor and VESA mount bracket) |
| ASB200-909 | Fanless chassis with IB909AF5350, Intel® i5-5350U 1.8GHz CPU, 2x COM, 2x 2GB DDR3L memory, 2.5" 320GB SATA HDD (w/o 60W power adaptor and VESA mount bracket) |

Dimensions and Drawing

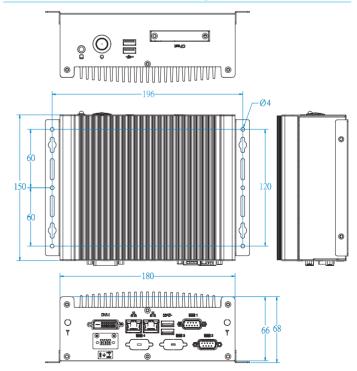




ASB200-909 Slim Type System for IBASE IB909 3.5" Disk-Size SBC

Intelligent Multiple I/O Ports





CFast Installation





2-in-1 Design for Wall Mounting & VESA Mounting



